

Technical Information




The Predator ED series are an Absorbent Glass Mat (AGM) battery designed for Deep Cycle applications including recreational and leisure as well as industrial.

The valve regulated, non-spillable design delivers outstanding cycle life and a low self discharge rate. The Predator ED series are manufactured in a facility which is ISO 9001, 14001 & 45001 certified.


For standby and general purpose applications, the Predator ES series are recommended.

Features & Benefits


- Heavy Duty, Non-Spillable Design
- Low Self Discharge
- Designed for superior cycle life

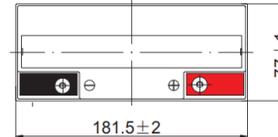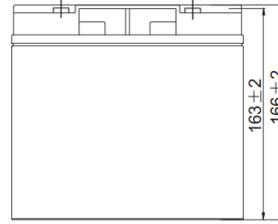


T12Terminal
Unit: mm [inches]



Discharge Characteristics

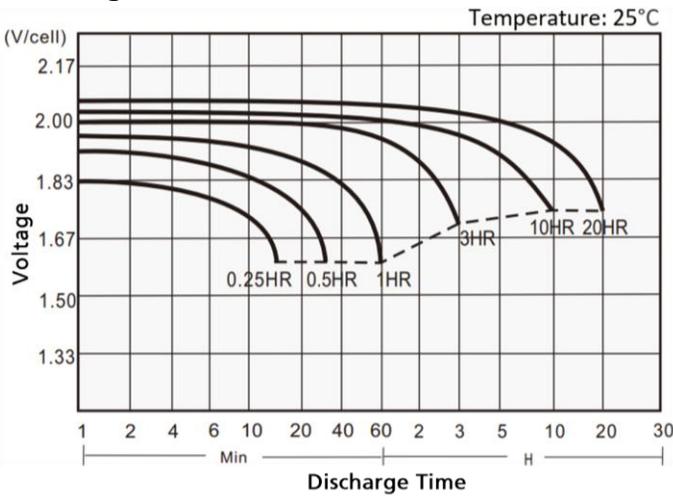

Cycle Life vs Depth of Discharge

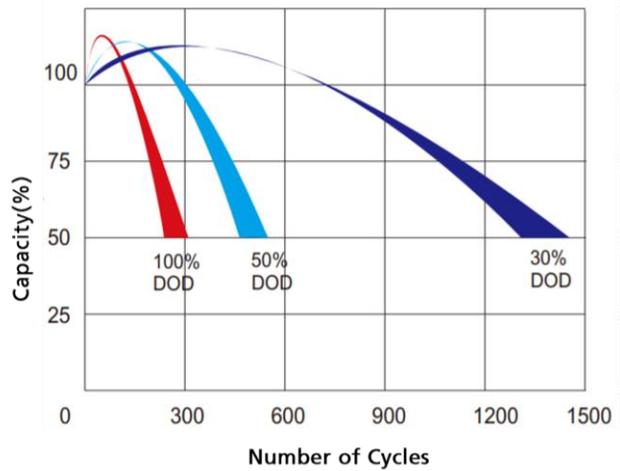

Technical Specifications

Battery Type	Deep Cycle AGM	Case Material Colour	ABS Red Case, White Lid
Voltage	12V	Charge Current	Recommended: 2.0A Maximum: 5.0A
Capacity (20 / 10 / 5Hr)	20 / 18.8 / 17.2Ah	Charge Voltage	14.1 – 14.4V @25°C (Temp. Coeff. -5mV/°C)
Internal Resistance (25°C)	Approx. 9mΩ	Float Voltage	13.5 – 13.8V @25°C (Temp. Coeff. -3mV/°C)
Overall Size (LxWxH ±2mm)	181.5 x 77 x 166mm	Operating Temp. Charge	0 to 40°C
Nominal Weight	6.9kg	Operating Temp. Discharge	-20 to 55°C