


Technical Information

The Predator ES series are an Absorbent Glass Mat (AGM) battery designed for general purpose & standby applications including UPS, communication & security systems. Their ActivFire certification makes them an excellent choice for fire panel applications.

The valve regulated, non-spillable design delivers outstanding cycle life and a low self discharge rate. The Predator ES series are manufactured in a facility which is ISO 9001, 14001 & 45001 certified.

For deep cycle applications, the Predator ED series are recommended.

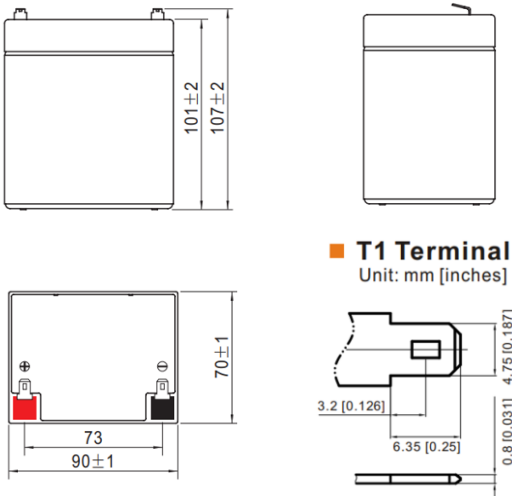


Features & Benefits

- ActivFire Certified
- Heavy Duty, Non-Spillable Design
- Glass Mat Separator Construction
- High Energy Density
- Low Self Discharge
- 5 years design life (@25°C)



Float Service Life @ 25°C

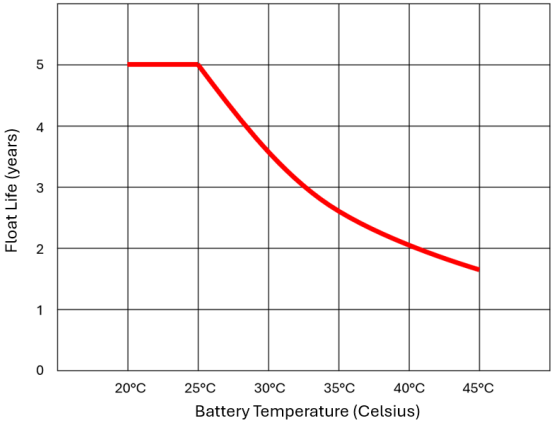

Technical Specifications			
Battery Type	General Purpose AGM	Case Material Colour	ABS Blue Case, White Lid
Voltage	12V	Charge Current	Recommended: 0.54A Maximum: 1.35A
Capacity (20 / 10 / 5Hr)	5.4 / 5.11 / 4.65Ah	Charge Voltage	14.1 – 14.4V @25°C (Temp. Coeff. -30mV/°C)
Internal Resistance (25°C)	Approx. 25mΩ	Float Voltage	13.5 – 13.8V @25°C (Temp. Coeff. -20mV/°C)
Overall Size (LxWxH ±2mm)	90 x 70 x 107mm	Operating Temp. Charge	-20 to 40°C
Nominal Weight	1.80kg	Operating Temp. Discharge	-15 to 50°C